
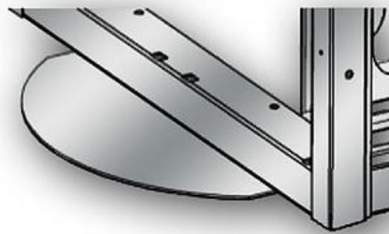


Bottom Options

BI: The Brush Infill Base closes the gap to the floor when levelers are used to raise the cabinet. See the part number chart to determine the size needed for your layout.

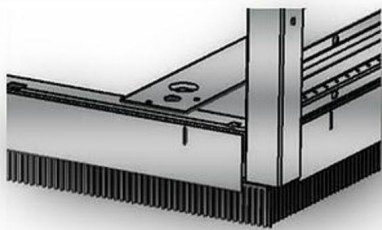

The Anti-Tip Base, shown here, ensures the integrity and safety of your server hardware preventing the cabinet from being pushed over for any reason. At 8" wide and 19" in length, it is certain to offer the peace of mind you need.

Part No.	CABINET WIDTH	CABINET DEPTH
BI-2432	24"	30"
BI-2436	24"	34"
BI-2442	24"	40"
BI-2632	26"	30"
BI-2636	26"	34"
BI-2642	26"	40"
BI-3032	31"	30"
BI-3036	31"	34"
BI-3042	31"	40"

Door Lock Options

All doors come standard with a cam-lock with 2 keys and a pull handle. This single-point lock can be upgraded to a 3-point lock upon request.



Also available is the 3-dial combination lock complete with a key/ lock override. This option is ideal for CO/LO applications where each user can program their own unique code and technicians can have universal access with a key. Add CL to the door part number Ex: SMDPX54CL.



The electronic key/lock controls access to cabinets and allows managers to review all entries to the enclosure. This unit will also monitor heat and moisture and control access for up to 300 enclosures, all monitored from one central location. Ask your dealer for ordering details. See next page for details

