


Heavy Duty Relay Racks

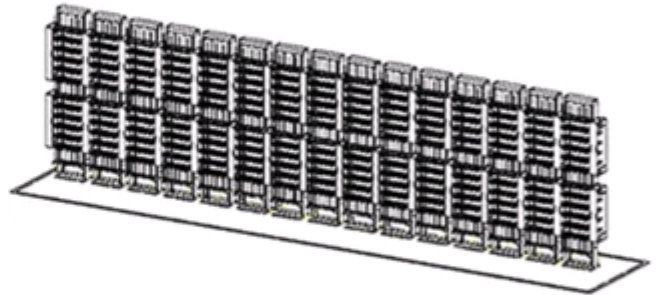

Features Each frame is:

(C) One piece welded construction made of 12 GA. C.R.S. that is tapped with 10-32 holes on the front flange.

(D) Holes are provided in the side of the rack for ganging. Bases are provided with cut-outs for bolting units to the floor. Isolator pads and bolting kits are available.

PART #	OVERALL WIDTH	OVERALL HOLES C/C	CLEARANCE BETWEEN UPRIGHTS	OVERALL HEIGHT	VERTICAL PANEL OPENING
	"A"	"B"	"C"	"D"	"E"
RR4219HD	21"	18 ⁵ / ₁₆ "	17 ¹³ / ₁₆ "	47 ⁵ / ₈ "	42 ¹ / ₈ "
RR7019HD	21"	18 ⁵ / ₁₆ "	17 ¹³ / ₁₆ "	75 ⁵ / ₈ "	70 ¹ / ₈ "
RR7719HD	21"	18 ⁵ / ₁₆ "	17 ¹³ / ₁₆ "	82 ⁵ / ₈ "	77 ¹ / ₈ "
RR8419HD	21"	18 ⁵ / ₁₆ "	17 ¹³ / ₁₆ "	89 ⁵ / ₈ "	84 ¹ / ₈ "
RR4223HD	25"	22 ⁵ / ₁₆ "	21 ¹³ / ₁₆ "	47 ⁵ / ₈ "	42 ¹ / ₈ "
RR7023HD	25"	22 ⁵ / ₁₆ "	21 ¹³ / ₁₆ "	75 ⁵ / ₈ "	70 ¹ / ₈ "
RR7723HD	25"	22 ⁵ / ₁₆ "	21 ¹³ / ₁₆ "	82 ⁵ / ₈ "	77 ¹ / ₈ "
RR8423HD	25"	22 ⁵ / ₁₆ "	21 ¹³ / ₁₆ "	89 ⁵ / ₈ "	84 ¹ / ₈ "

