

Shelves

Note:
For Reinforced shelves use suffix "R"
E.g. FS1915-1R



FIXED SHELF
FS1910-1
FS2310-1
FS1915-1
FS2315-1

Shelves are 1U
in height.

Note:
For Perforated shelves, use suffix "P"
E.g. FS1915-1P



ADJUSTABLE SHELF	SHELF DEPTH
CTSSHV-1922R	22"
CTSSHV-1926R	26"
CTSSHV-1930R	30"
CTSSHV-1934R	34"




Mounting Requirements, 2 pairs of
mounting angles.

(A) The saddle section is made from 14
gage cold rolled steel.

(B) The tray assembly is made from 16
gage cold rolled steel.

(C) The fully extendable, positive stop
sliders are ball bearing mounted and
made of steel for smooth action.

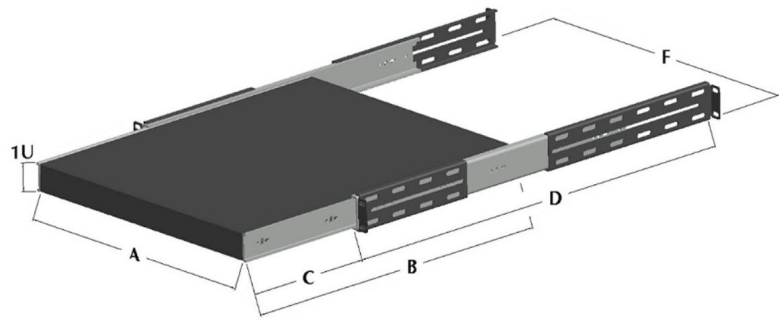

SHELF PART No.	TRAY WIDTH "A"	TRAY WIDTH "B"	MAX. EXTENSION OF TRAY "C"	DEPTH ASSEMBLY "D"	PANEL WIDTH "F"
SS1916	16 1/2"	16"	16"	16" - 21 3/8"	19"
SS1920	16 1/2"	20"	20"	20" - 29"	19"
SS1924	16 1/2"	24"	24"	24" - 31 1/2"	19"
SS2326	20 1/2"	16"	16"	16" - 21 3/8"	23"
SS2320	20 1/2"	20"	20"	20" - 29"	23"
SS2324	20 1/2"	24"	24"	24" - 31 1/2"	23"