


## Part No: DL-Z4KIT

Seismic Bolt Down Kit, 5/8"-11 Thread Size

Includes 3 ½" – 5/8"-11 Rod, 5/8"-11 Nut, 5/8"- Lock washer, 5/8"- Flat washer

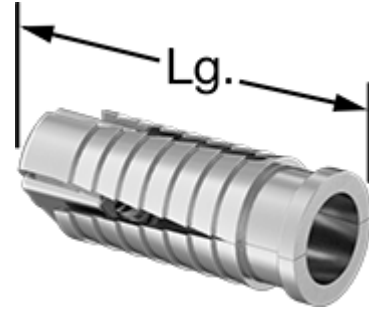

Material	Zinc Alloy
Thread Size	5/8"-11
Screw Size	5/8"
Length	2 5/8"
Drill Bit Size	1 1/8"
Drill Bit Decimal Size Equivalent	1.125"
Min. Installation Depth	2 5/8"
Diameter	1 1/8"
Strength, lbs.	
Pull-Out	1,400
Shear	3,500
Tested In	4,000 psi Concrete
Thread	
Direction	Right Hand
Type	UNC
Spacing	Coarse
Fit	Class 2B
For Use In	Block, Brick, Concrete, Stone
Removable	Permanent
Anchor Type	Female Threaded
System of Measurement	Inch
RoHS	RoHS 3 (2015/863/EU) Compliant
REACH	REACH (EC 1907/2006) (06/25/2020, 209 SVHC) Compliant
DFARS	Specialty Metals COTS-Exempt

Often referred to as four-way expansion anchors, these expand in four directions to resist loosening from vibration. To install, tap into a drilled hole with a hammer and position your fixture. Then, insert a screw or threaded rod and tighten. Pull-out strength and shear strength values are 25% of the ultimate values.